

UKL SIGHT GLASS

UKL offers Sight Glasses which enables the visualization of liquid in the pipeline. This helps in pre-empting problems occurring in the equipment upstream or downstream of the glass.

UKL Sight Glass consist of toughened Borosilicate glass, thermally pre stressed, optically tested.

UKL Sight Glass Double window type uses Klinger glasses for consistent, reliable, trouble free performance.

APPLICATIONS:-

UKL Sight Glass can be fitted on a condensate line to monitor steam leakages in the condensate because of the improved visibility it offers, UKL Sight Glass is especially suited for use in lines with high-speed flow.

The flow of oil and oil vapor can be visualized using sight glass. UKL Sight Glass for observation of processes in industrial ovens, driers, filters, strainers, agitators and mixers.

UKL Sight Glass can be used to check the efficiency of heat exchangers, especially in condensers, reboilers.

UKL Sight Glass can be installed in any direction.

Graphite/ CAF gaskets are used to avoid leakages.

OPERATING CONDITIONS:

- Max Operating pressure - 40 kg/cm²
- Max Operating Temp. - 300 °C
- Cold Hydro test pressure - 60 kg/cm²

Class	Temperature	38 ⁰ C
#150	Pressure (kg/cm ²)	19.6
#300		40



INSTALLATION:-

Preferably in horizontal position.

OPTIONAL:-

- IBR/Non-IBR
- Flanged End ANSI #150/#300

END CONNECTIONS:

- Socket Weld to ASME B 16.11
- Screwed BSP / NPT / BSPT
- Flanged End as per BS 10, #150/ #300


MATERIAL OF CONSTRUCTION:

ASTM A 216 Gr. WCB

SIZES AVAILABLE:-

15NB, 20NB, 25NB, 40NB and 50 NB

UKL-DS-USG-R00-MAY 2017

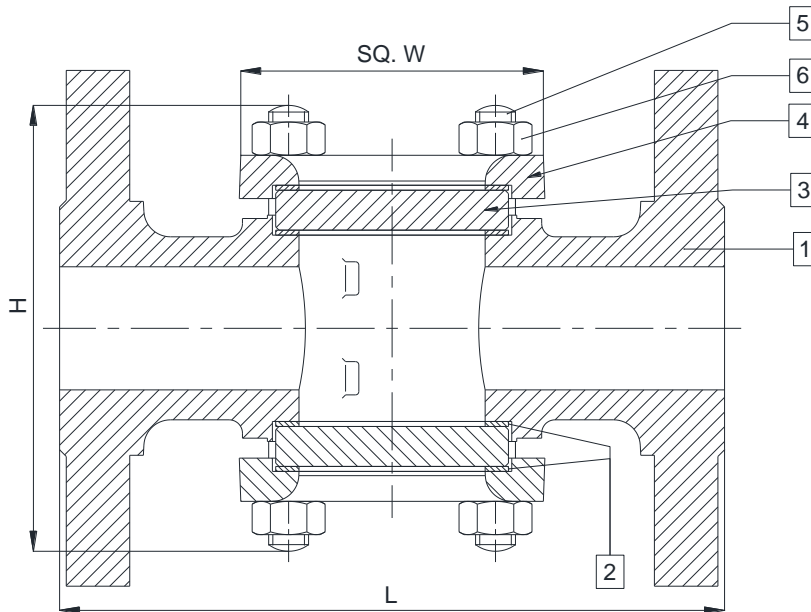

No.	PART NAME	MATERIAL	MATERIAL CODE
1	Body	Carbon Steel	ASTM A 216 Gr WCB
2	Gasket	Graphite Gasket With AISI316 Reinforcement	
3	Glass	Toughened Borosilicate Transparent Glass	
4	Cover	Carbon Steel	ASTM A 216 Gr WCB / ASTM A 515 Gr70 / ASTM A 516 Gr.70
5	Stud	Alloy Steel	ASTM 193 Gr. B7
6	Nut	Alloy Steel	ASTM 194 Gr. 2H

DIMENSIONS (mm)

SW/Screwed and Flanged End

Sr.	Size	L	H	SQ. W	Weight (kg)
1	15	130.00	101.00	56.00	2.1
2	20	130.00	104.00	66.00	2.2
3	25	160.00	110.00	71.00	2.8
4	40	200.00	134.00	91.00	7.0
5	50	230.00	159.00	101.00	7.7



Cast / Forged Steel Piston Valves, Bellow seal valves, High Pressure valves (Gate/Globe), Strainers – “Y” Type Steam Traps (Thermodynamic, Thermostatic, Ball Float Traps), Pressure Reducing Station, Condensate Recovery Products. Level Gauges (Reflex, Transparent, Bicolor), Sight Glass, Hot Water Generation System, Safety and Relief Valves. FSD Products : Compressed Asbestos / Non Asbestos Fiber Sheetting / Cut Gaskets, Spiral Wound Gaskets.

In view of technical progress design and dimensions are subjected to change without notice.

UKL® UNI KLINGER LIMITED
A joint venture of the Neterwala group of companies and KLINGER AG. Switzerland.

Central Sales Office & Pune Branch : SC1, 5th Fl., Kohinoor Est. Mumbai-Pune Highway, Khadki, Pune-411 003. Tel.: +91-20-4102 3000 Fax.: (020) 4102 3001
e-mail : salesco@uniklinger.com, salespune@uniklinger.com, Website: www.uniklinger.com

Factory : C-37, M.I.D.C., Ahmednagar – 414 111, Maharashtra, Tel. : 0241 – 2777223 / 2777512 Fax : 0241 – 2777294, E-mail : fdworks@uniklinger.com

Branch Offices :

Baroda : 102, 1st Floor, Otel Towers-II R.C. Dutt Road, Baroda-390 005, Tel.: 91-0265-2312343 / 2340660, Fax.: 91-265-2341419. E-mail : salesbar@uniklinger.com
Chennai : East Coast Centre, 5th Floor, 553, Mount road, Teyanampet, Chennai - 600 018, Tel.: 91 - 44 - 24345707. Fax.: 91 - 44 - 24343960. E-mail : saleschen@uniklinger.com
Kolkata : 9, Chitrakoot, 8th Floor, 230 A, AJC Bose road, Kolkatta-700 020, Tel.: 91-33-22872510, Fax.: 91-33-22876494. E-mail : salescal@uniklinger.com
Mumbai : 22, 2nd Flr, Shreeji Arcade CHS, Almeda road, Thane-400 602, Tel.: 91-22-25421140 / 91-22-25440461, Fax.: 91-22-25440463. E-mail : salesmum@uniklinger.com
Delhi : 321, Ansal Chamber-II, 6, Bhikaji Cama Place, New Delhi-110 066, Tel.: 91-11-41658767 / 91-11-26193847, Fax.: 91-11-41658768. E-mail : salesdel@uniklinger.com